

INSTALLATION INFO for DNA P-H10E16-01 Air Filter Set


Application: CRF 1000 Africa Twin 2016'

The DNA High Performance Air Filter SET P-H10E16-01 is designed to replace the stock HONDA air filters and increase the Airflow, Filtering efficiency, Power, Torque and Throttle response.

1. Remove the stock air filters from the bike, following the instructions found in the official HONDA workshop manual.
Be very careful when removing the stock filters, so debris doesn't fall in the clean side of the air box.




2. Apply DNA air filter sealing grease (included with the filters), on the EVA foam gasket contact surface of both filters, as displayed.

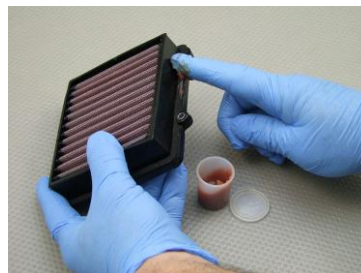

Attention: *it is recommended that you use Nitrile or Latex rubber gloves to apply the grease.*

3. Install the DNA High Performance Air Filters using the stock Honda screws. Close the air box covers Do Not ovetighten the screws! and reinstall all the parts.
Follow the above procedure each time you need to remove the DNA filters for servicing it.
 - Service every 10.000 km or earlier when used in extremely dusty environment. Use the dedicated DNA Service Kit DSK-2001 (sold separately) to clean and re-oil, following the instructions included with the service kit.

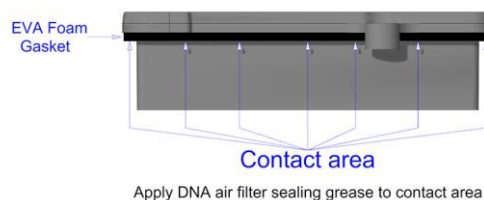

The manufacturer and seller make no warranties express or implied which extend beyond the description of the goods contained herein.

Any description of this product is for the purpose of identifying it and shall not be deemed to create an express warranty.

www.dnafilts.com
www.facebook.com/dnafilts
techsupport@dnafilts.com

INSTALLATION INFO for DNA P-H10E16-01 Air Filter Set


Application: CRF 1000 Africa Twin 2016'

The DNA High Performance Air Filter SET P-H10E16-01 is designed to replace the stock HONDA air filters and increase the Airflow, Filtering efficiency, Power, Torque and Throttle response.

4. Remove the stock air filters from the bike, following the instructions found in the official HONDA workshop manual.
Be very careful when removing the stock filters, so debris doesn't fall in the clean side of the air box.




5. Apply DNA air filter sealing grease (included with the filters), on the EVA foam gasket contact surface of both filters, as displayed.

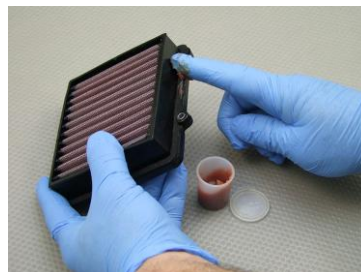

Attention: *it is recommended that you use Nitrile or Latex rubber gloves to apply the grease.*

6. Install the DNA High Performance Air Filters using the stock Honda screws. Close the air box covers Do Not ovetighten the screws! and reinstall all the parts.
Follow the above procedure each time you need to remove the DNA filters for servicing it.
 - Service every 10.000 km or earlier when used in extremely dusty environment. Use the dedicated DNA Service Kit DSK-2001 (sold separately) to clean and re-oil, following the instructions included with the service kit.

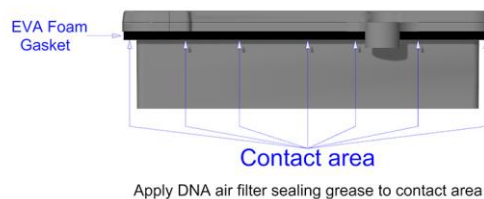

The manufacturer and seller make no warranties express or implied which extend beyond the description of the goods contained herein.

Any description of this product is for the purpose of identifying it and shall not be deemed to create an express warranty.

www.dnafilts.com
www.facebook.com/dnafilts
techsupport@dnafilts.com