

The DNA High Performance filter P-H3SC07-01 is designed to replace the SH 300 i 2007 stock replacement filter,
To install or later remove your DNA filter for cleaning it, please follow the detailed info listed below:
(we recommend that the installation should be carried out by a trained mechanic)

1. Unbolt the side of the airbox to access the 3 screws that secure the stock filter in place.

Unscrew carefully and remove the stock filter.

Pay attention NOT to drop any screws in the airbox!

Clean the airbox carefully, removing all the debris.

2. Remove from the air box the stock foam **O-ring**, you will not need it as the DNA filter has a rubber O-ring part that seals in the air box groove.




Attention !!! : if the foam O-ring is not removed the filter will not sit properly in the air box, the air box cover will NOT close and possible damage to the engine will occur.

3. Install the DNA filter in the airbox carefully.

Check that the filter is located properly in place and secure using the 3 stock screws (A', B', C').

Do Not Overtighten
bolts A', B', C'

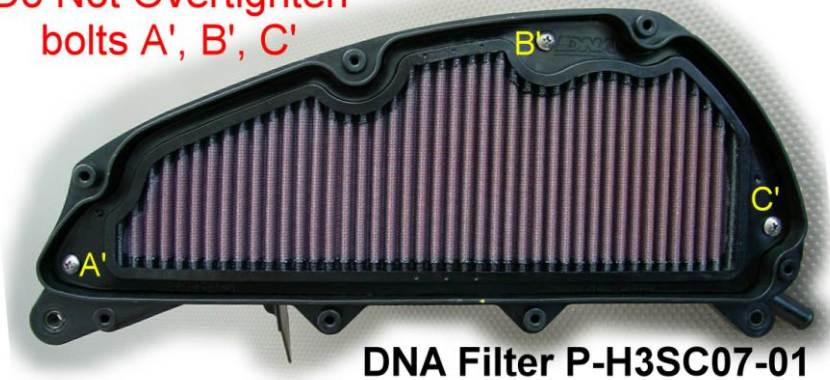

Carefully close the airbox and the installation is completed.

Follow the Service Kit Instructions to service.
Re-install following the installation procedure again.

www.dnafilts.com

Made in EU / Greece