

INSTALLATION INFO for DNA filter P-Y4E10-0R
For: YZ 450 F 2010'

The DNA High Performance filter P-Y4E10-0R is designed to replace the YZ 450 F 2010 stock FOAM replacement filter, the pre-filter and the stock wire mesh, without any modification and can be used for Supermoto and Motocross racing use.


To install or later remove your DNA filter for cleaning it, please follow the Yamaha Service Manual instructions and the DNA additional info listed below:

(We recommend that the installation should be carried out by a trained mechanic)

1. Follow the Yamaha Service Manual air filter removal instructions and remove the stock foam filter, the additional thin foam filter and the wire mesh. **You will not use the thin foam filter and the wire mesh with your DNA filter.**

Clean carefully the dirty side of the air box using a vacuum cleaner and following wipe it with a clean cloth.

CAUTION: do not use pressurized air as dirt will enter the engine and possible damage will be caused.

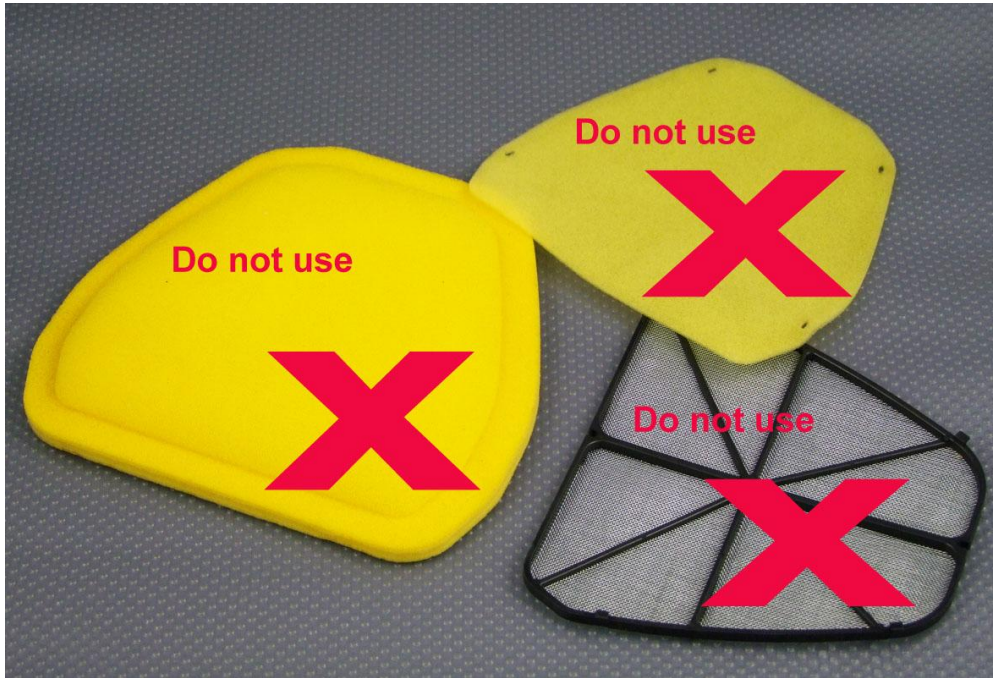

2. Before installing the DNA filter you must apply DNA air filter sealing grease (supplied with the filter) all around the bottom sealing surface of the filter. See the photo bellow:



NOTE: we recommend using latex gloves to apply the sealing grease.