

INSTALLATION INFO for DNA filter R-K7N06-01 Kawasaki ZR 750 / Zephyr 750 / Zephyr 400

The DNA High Performance filter for the **Kawasaki ZR 750 / Zephyr 750 / Zephyr 400** is designed to replace the stock replacement foam filter.

To install or later remove your DNA filter for cleaning it, please follow the detailed info listed below:

A) Removing the stock filter:

Open the air box and remove the stock filter.
Clean the air box using a dry cloth.



B) Preparing the DNA filter:

Apply a small amount of DNA filter sealing grease (included) around the rubber O-ring inlet and the EVA Foam gasket (open side of the filter) and at positions A' & B' (closed side of the filter).



C) Installing the DNA filter:

Carefully push the DNA filter in the air box, using your fingers (see photo below) until the filter locks in place.

Attention! : the 2 tabs marked << Top Side>> must face the top side.

Close the air box and you are ready to go.




D) Removing the filter for servicing:

Open the air box and using pliers, hold the DNA filter from the tab that is located at the open side of the filter and pull upwards until the filter is removed.

Attention! : be very careful not to damage the filtering Media, **hold only the rubber tab !**

Follow the Service Kit Instructions to service and re-install, following the installation procedure again.

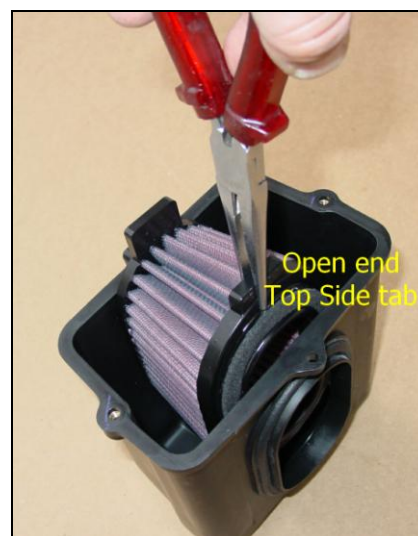

www.dnafilters.com